



Commercial Program



FREE SHIPPING ON ORDERS OF \$450 OR MORE

TO ORDER: 1-800-777-7094 MONDAY TO FRIDAY 7 A.M. – 7 P.M. CT | [AMSOIL.ca](https://www.amsoil.ca)

Reduce Costs and Maintenance. Increase Profits and Peace of Mind.

Managing your business and focusing on work leaves little time or energy for maintaining vehicles and equipment. But you push your equipment to the limit in the name of productivity, which is critical to satisfying your customers and remaining profitable. Implementing a maintenance program centered around AMSOIL synthetic lubricants helps you answer these challenges. AMSOIL synthetic lubricants and performance products are tough, reliable and long-lasting. We formulate them to save you time and money while providing peace of mind that your vehicles and equipment are receiving the protection they need.

WHOLESALE PRICING

Open a commercial account for access to AMSOIL products at the lowest possible prices for use in your business vehicles and equipment. Establishing a commercial account is simple and best of all, free. You will save up to 25 percent off MSRP and automatically earn purchase discounts based on your cumulative annual order value.

FREE SHIPPING

AMSOIL commercial accounts receive free shipping for order totals of \$450 or more on products stocked in AMSOIL distribution centers (DCs). If the order total is less than \$450, a flat shipping rate of \$13.99 applies. Shipments to a small minority of outlying areas remain subject to additional interline fees. Visit www.AMSOIL.ca/w/store/InterlineFeeLookup for more information.

SAVE ON MAINTENANCE COSTS

Not only does reduced maintenance save money, AMSOIL synthetic lubricants deliver additional savings by maximizing fuel economy and extending

drain intervals. Invest more money in growing your business, not repairing your vehicles.

PROTECT YOUR INVESTMENT

AMSOIL synthetic lubricants deliver proven wear protection in the most demanding vehicles and equipment. By guarding against wear and deposits, they protect the power and efficiency of your equipment and maximize engine and component life.

EXTENSIVE PRODUCT LINE

AMSOIL offers everything from advanced synthetic drivetrain lubricants to premium fuel additives. The complete AMSOIL product line ensures all your equipment is protected.

PERSONALIZED SERVICE

Accounts are serviced by independent AMSOIL Dealers available to help map out a lubrication program designed to maximize vehicle performance while saving money. AMSOIL INC. corporate personnel are also available to offer technical and administrative support. Accounts may order directly from AMSOIL INC. or through their servicing Dealer. Qualified accounts may also apply for credit with AMSOIL, simplifying the payment process.

MYAMSOILGARAGE™

MyAMSOILGarage is a free, easy-to-use online vehicle maintenance program that allows you to organize maintenance records for an unlimited amount of vehicles and equipment. Schedule email reminders for future services and track any service performed, whether using AMSOIL products or not.

Visit AMSOIL.ca/whymygarage.aspx to establish a free account.

Product Index

Motor Oil	14
Diesel Oil	22
Filters	28
European Motor Oil	29
Transmission Fluid/Oil Analysis	30
Gear Lube	32
Grease	34
Small-Engine Oil/2-Stroke Oil	36
Gasoline Fuel Additives	42
Diesel Fuel Additives	44
Cleaners and Protectants	46
Coolant/Coolant Boost	48
Air Tool Oil/ Compressor Oil Power Steering Fluid	50



All AMSOIL lubricants and filters are covered by the AMSOIL Limited Warranty. For details visit AMSOIL.ca/warranty.aspx.

***All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use.*



LandCare Innovations Saves on Repairs and Maintenance

INCREASED RETURN ON ZERO-TURN MOWERS

“Our zero-turn mowers are running day in and day out. They’re faced with severe-duty service five to six days a week for seven to eight hours nonstop. The premium lubrication qualities provided by AMSOIL products are essential, and we perform oil changes and grease points every 200 to 250 hours.”

REDUCED TRUCK FLEET MAINTENANCE

“We put these trucks through severe-duty service - they’re idling, they’re towing and hauling our equipment in dusty, dirty, hot conditions. With AMSOIL products, we just don’t worry about our vehicles and equipment.”

– *Tim Wilson, LandCare Innovations*



Contractors

Successful businesses are built on satisfied customers and excellent service. AMSOIL provides the synthetic edge in protection, helping you succeed by preserving the power of your equipment, extending equipment life and maximizing reliability, allowing you to work more efficiently, honor your commitments and put more money in the bank.

- **Spend** Less Time on Maintenance
- **Designed** Specifically for Severe Service
- **Reduce** Costs and Minimize Downtime
- **Simplify** Maintenance with One Mix Ratio for all Your Handheld Two-Stroke Equipment







Fleets

As a fleet manager, you're constantly challenged to find ways to maintain, or even lower, your fleet's operating costs as equipment, parts and fuel expenses continually rise. It's especially challenging considering the extreme operating conditions your vehicles endure. Idle time, short trips, towing and hauling take their toll on conventional lubricants, reducing their ability to adequately protect critical components and leading to expensive repairs and downtime that seriously hinder your cost-reduction efforts. AMSOIL synthetic lubricants incorporate advanced synthetic technology and additive chemistry designed to provide unmatched protection and performance in the extreme conditions encountered by fleet vehicles, while supporting your efforts to reduce costs and control unexpected repairs and downtime.

- **Excellent** Severe-Service Wear Protection
- **Help** Reduce Heat
- **Help** Maximize Fuel Economy
- **Resist** Oil Consumption





Farm & Ranch

Farmers and ranchers are constantly challenged to maximize productivity while maintaining, or even lowering, operating costs as equipment, parts and fuel expenses continually rise. It's especially challenging considering the hot operating temperatures and heavy loads endured by farm and ranch equipment, leading to expensive repairs and downtime that can put you behind schedule and hinder your cost-reduction efforts. AMSOIL synthetic lubricants are designed to provide unmatched protection, performance and reliability in these extreme conditions, while supporting your efforts to reduce costs and control unexpected repairs and downtime.

- **Improved** Equipment Performance and Life
- **Reduce** Costs and Minimize Downtime
- **Resist** Oil Consumption
- **Extended** Drain Intervals



Over-the-Road Trucks

Changing regulations, fuel costs and rising equipment costs are just a few of the challenges to running a trucking business. When your truck is your livelihood it has to last, so it's imperative that you take care of it. AMSOIL delivers the above-and-beyond protection that not only keeps your truck on the road, but helps you save money by optimizing fuel economy and reducing maintenance and downtime.

- **Reduced** Oil Consumption
- **Superior** Wear Protection
- **Maximum** Fuel Economy
- **Extended** Drain Intervals





AMSOIL Products Help Trucker Eclipse Two Million Miles

When Jerry Pruett purchased his new 1999 Kenworth** over-the-road truck in December 1998, he installed AMSOIL synthetic lubricants. After reaching 2.57 million km on the original transmission and differentials and 1.77 million km on the factory-rebuilt engine in 2012, Pruett has since eclipsed 3.2 million km and shows no signs of slowing down.

Heavy-Duty Off-Road

People depend on you to get the job done right the first time, and the equipment you use has to stand up to all-day, every-day use. When equipment goes down, so do reputation and profit. AMSOIL provides reserve protection that goes beyond industry standards to guard against the headaches and losses caused by equipment downtime.

- **Improved** Equipment Performance and Life
- **Easier** Cold Starts, Faster Oil Circulation
- **Minimize** Downtime
- **Superior** Wear Protection








AMSOIL Resists Viscosity Increase

AMSOIL is barely challenged by the industry-standard testing, demonstrating only a 0.1% viscosity increase. Even when the test length is doubled, AMSOIL **delivered twice the viscosity control** required by the standard.^{GG}

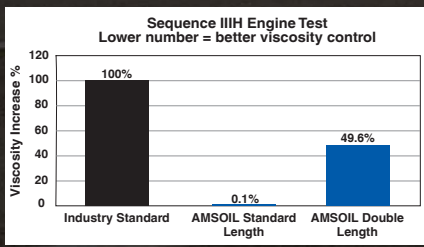

^{GG}Based on independent testing of AMSOIL Signature Series 5W-30 in the Sequence IIH Engine Test (ASTM D6111), required by the ILSAC GF-6 and API SP specifications.

Signature Series Synthetic Motor Oil

Engineered for those seeking maximum protection and performance. Precision-formulated with cutting-edge technology and a longstanding devotion to making the world's best motor oil. The result: engine protection that blows the doors off the highest industry standards. Guaranteed protection for up to 40,200 kilometers or 1 year, whichever comes first.

ASM



ALM



AZO



ASL



ATM



AZF



AMR



● 0W-20

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1[®] Gen 2 • Ford WSS-M2C947-A, WSS-M2C947-B1 • Chrysler MS-6395 • ACEA A1/B1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ASMQTC	EA	(1) 946-ml Bottle	12.95
ASMQTC	CA	(12) 946-ml Bottles	147.60
ASM1GC	EA	(1) 3.78-litre Bottle	50.20
ASM1GC	CA	(4) 3.78-litre Bottles	191.20
ASM30	EA	113-litre Drum*	1,315.55
ASM55	EA	208-litre Drum*	2,343.65

● 5W-20

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1[®] Gen 2 • Ford WSS-M2C930-A, WSS-M2C945-A, WSS-M2C945-B1 • Chrysler MS-6395 • ACEA A1/B1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ALMQTC	EA	(1) 946-ml Bottle	12.95
ALMQTC	CA	(12) 946-ml Bottles	147.60
ALM1GC	EA	(1) 3.78-litre Bottle	50.20
ALM1GC	CA	(4) 3.78-litre Bottles	191.20
ALM30	EA	113-litre Drum*	1,315.55
ALM55	EA	208-litre Drum*	2,343.65
ALM27	EA	1,041-litre Tote*	11,677.00

● 0W-30

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1[®] Gen 2 • Chrysler MS-6395 • ACEA A1/B1, A5/B5

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
AZQTC	EA	(1) 946-ml Bottle	12.95
AZQTC	CA	(12) 946-ml Bottles	147.60
AZ030	EA	113-litre Drum*	1,315.55
AZ055	EA	208-litre Drum*	2,343.65
AZ027	EA	1,041-litre Tote*	11,677.00

● 5W-30

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1[®] Gen 2 • Ford WSS-M2C929-A, WSS-M2C946-A, WSS-M2C946-B1 • Chrysler MS-6395 • ACEA A1/B1, A5/B5 • Honda HTO-06

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ASLQTC	EA	(1) 946-ml Bottle	12.95
ASLQTC	CA	(12) 946-ml Bottles	147.60
ASL1GC	EA	(1) 3.78-litre Bottle	50.20
ASL1GC	CA	(4) 3.78-litre Bottles	191.20
ASL30	EA	113-litre Drum*	1,315.55
ASL55	EA	208-litre Drum*	2,343.65
ASL27	EA	1,041-litre Tote*	11,677.00

● 10W-30

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM 4718M, 6094M, LL-A-025 • Ford WSS-M2C205-A • Chrysler MS-6395 • ACEA A1/B1, A5/B5

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ATMQTC	EA	(1) 946-ml Bottle	12.95
ATMQTC	CA	(12) 946-ml Bottles	147.60
ATM30	EA	113-litre Drum*	1,315.55
ATM55	EA	208-litre Drum*	2,343.65
ATM27	EA	1,041-litre Tote*	11,677.00

● 0W-40

Use in vehicles that require API SP, SN PLUS, SN... • Chrysler MS-12633, MS-10725, MS-10850 • Nissan GT-R[®]

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
AZFQTC	EA	(1) 946-ml Bottle	12.95
AZFQTC	CA	(12) 946-ml Bottles	147.60

○ 5W-50

Use in vehicles that require API SP, SN PLUS, SN... • Ford WSS-M2C931-C (Mustang)

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
AMRQTC	EA	(1) 946-ml Bottle	12.95
AMRQTC	CA	(12) 946-ml Bottles	147.60
AMR55	EA	208-litre Drum*	2,343.65

*Not stocked in all distribution centers. Call for availability.

How Do AMSOIL Products Stand Up?

Gasoline Vehicles

OUTPERFORMS INDUSTRY STANDARDS

The Sequence IVA Engine Test simulates extended periods of stop-and-go driving – conditions that encourage engine wear. We used Signature Series 0W-20, the lightest viscosity in the line, to further increase the severity of the test. **AMSOIL Signature Series Synthetic Motor Oil provided 75 percent more engine protection against horsepower loss and wear¹ than required by the industry standard,** extending the life of vital components like pistons and cams.

PROTECTS AGAINST LSPI

Occurring in today's advanced engines, low-speed pre-ignition (LSPI) is the spontaneous ignition of the fuel/air mixture prior to spark-triggered ignition. Original equipment manufacturers (OEMs) like GM** have addressed the issue by designing tests to determine a motor oil's ability to prevent LSPI. **Signature Series Synthetic Motor Oil provided 100 percent protection against LSPI²** – zero occurrences were recorded throughout five consecutive tests.

¹Based on independent testing of AMSOIL Signature Series 0W-20, in ASTM D6891 as required by the API SN PLUS specification. ²Based on independent testing of AMSOIL Signature Series 5W-30 motor oil, in the LSPI engine test as required for the GM dexos1™ Gen 2 specification.

Signature Series Delivers Powerful Protection

AMSOIL delivers powerful protection. How good is it? An independent lab compared AMSOIL synthetic motor oil head-to-head against a leading competitor in a 160,934-km test³. AMSOIL provided far superior wear protection and kept bearings looking like new.



³Testing conducted in an independent lab using AMSOIL Signature Series 5W-30 Synthetic Motor Oil and a leading synthetic-blend 5W-30 motor oil in Ford F-150 trucks with 3.5L twin-turbo engines.





Signature Series Guards Turbos

Protects turbochargers **72% better** than required^C by the GM dexos1™ Gen 2 specification.

^CBased on independent testing of AMSOIL Signature Series 5W-30 in the GM turbo coking test.


Signature Series Cleans

AMSOIL Signature Series Synthetic Motor Oil has **50% more** detergents^D to help keep oil passages clean and promote oil circulation. It provides **90% better protection** against sludge^{DD}.

^Dvs. AMSOIL OE Motor Oil^{DD} ^{DD}Based on independent testing of AMSOIL Signature Series 5W-30 in the ASTM D6593 engine test for oil screen plugging as required by the API SN PLUS specification.

Signature Series Helps Keep Valves Clean

AMSOIL fights volatility^U **38% better** than Mobil 1™ and **17% better** than Royal Purple,^V helping reduce oil consumption and keep valves clean.

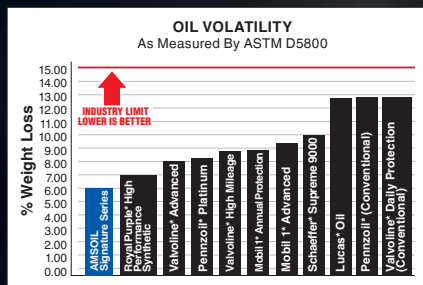

^UBased on independent testing of AMSOIL Signature Series Synthetic 5W-20, Mobil 1 Advanced Synthetic 5W-20, Royal Purple High Performance Synthetic 5W-20 in ASTM D5800. Oils purchased Oct.-Nov. 2018.


AMSOIL Helps Keep Engines Cleaner

AMSOIL Signature Series is fortified with a heavy treatment of detergent additives, delivering **28 percent more acid-neutralizing power** than Mobil 1* and helping engines stay cleaner, longer.^{LL}

^{LL}Based upon independent testing of Mobil 1 Annual Protection Full Synthetic 5W-30 and AMSOIL Signature Series 5W-30 in ASTM D2896. Oils purchased July 2020.

XL Resists Oil Breakdown

Provides **64% more protection** against oil breakdown^F than required by the GM dexos1™ Gen 2 specification.

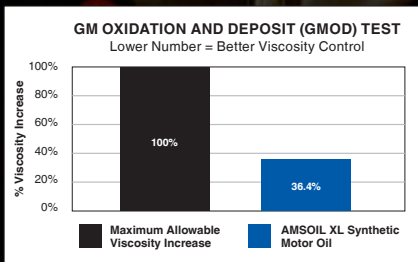

^FBased on independent testing of AMSOIL XL 5W-30 motor oil in the GMOD engine test required for the GM dexos1 Gen2 specification.



XL Synthetic Motor Oil

For those who want to do something extra for their vehicle. Engineered for advanced automotive technology, including turbos and direct injection. Boosted formulation delivers more cleaning power and wear protection that lasts up to 19,300 kilometers or 1 year, whichever comes first.

● XL 0W-20

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos™ Gen 2 • Ford WSS-M2C947-A, WSS-M2C947-B1 • Chrysler MS-6395 • ACEA A1/B1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
XLZQTC	EA	(1) 946-ml Bottle	10.25
XLZQTC	CA	(12) 946-ml Bottles	117.00
XLZ1GC	EA	(1) 3.78-litre Bottle	40.05
XLZ1GC	CA	(4) 3.78-litre Bottles	152.40
XLZ30	EA	113-litre Drum*	1,015.70
XLZ55	EA	208-litre Drum*	1,794.95
XLZ27	EA	1,041-litre Tote*	8,931.90

● XL 5W-20

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos™ Gen 2 • Ford WSS-M2C930-A, WSS-M2C945-A, WSS-M2C945-B1 • Chrysler MS-6395 • ACEA A1/B1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
XLMQTC	EA	(1) 946-ml Bottle	10.25
XLMQTC	CA	(12) 946-ml Bottles	117.00
XLM1GC	EA	(1) 3.78-litre Bottle	40.05
XLM1GC	CA	(4) 3.78-litre Bottles	152.40
XLM30	EA	113-litre Drum*	1,015.70
XLM55	EA	208-litre Drum*	1,794.95
XLM27	EA	1,041-litre Tote*	8,931.90

● XL 5W-30

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos™ Gen 2 • Ford WSS-M2C929-A, WSS-M2C946-A, WSS-M2C946-B1 • Chrysler MS-6395 • ACEA A1/B1, A5/B5 • Honda HTO-06

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
XLFQTC	EA	(1) 946-ml Bottle	10.25
XLFQTC	CA	(12) 946-ml Bottles	117.00
XLF1GC	EA	(1) 3.78-litre Bottle	40.05
XLF1GC	CA	(4) 3.78-litre Bottles	152.40
XLF30	EA	113-litre Drum*	1,015.70
XLF55	EA	208-litre Drum*	1,794.95
XLF27	EA	1,041-litre Tote*	8,931.90

● XL 10W-30

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM 4718M, 6094M • Ford WSS-M2C205-A • Chrysler MS-6395 • ACEA A1/B1, A5/B5

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
XLTQTC	EA	(1) 946-ml Bottle	10.25
XLTQTC	CA	(12) 946-ml Bottles	117.00
XLT30	EA	113-litre Drum*	1,015.70
XLT55	EA	208-litre Drum*	1,794.95
XLT27	EA	1,041-litre Tote*	8,931.90

○ XL 10W-40

Use in vehicles that require API SP, SN PLUS, SN... • ACEA A3/B3, A3/B4

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
XLOQT	EA	(1) 946-ml Bottle	10.25
XLOQT	CA	(12) 946-ml Bottles	117.00
XLO30	EA	113-litre Drum*	1,015.70
XLO55	EA	208-litre Drum*	1,794.95
XLO27	EA	1,041-litre Tote*	8,931.90

XLZ



XLM



XLF



XLT



XLO




*Not stocked in all distribution centers. Call for availability.



OE Protects Against Wear

Provides **47 percent** more wear protection.⁶

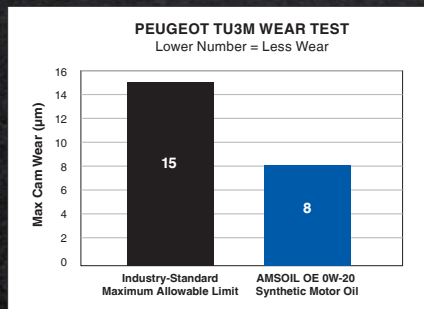

⁶Based on independent testing of OE 0W-20 in the Peugeot TU3M Wear Test as required by the dexos1 Gen 2 specification.



OE Synthetic Motor Oil

Delivers 100% synthetic engine protection for advanced automotive technology, including turbos and direct injection. Specifically formulated for the longer drain intervals recommended by original equipment (OE) manufacturers.

● OE 0W-16

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6B

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
OESQT	EA	(1) 946-ml Bottle	7.75
OESQT	CA	(12) 946-ml Bottles	88.20

● OE 0W-20

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1[®] Gen 2 • Ford WSS-M2C947-A, WSS-M2C947-B1 • Chrysler MS-6395 • ACEA A1/B1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
OEZQTC	EA	(1) 946-ml Bottle	7.75
OEZQTC	CA	(12) 946-ml Bottles	88.20
OEZ1GC	EA	(1) 3.78-litre Bottle	30.20
OEZ1GC	CA	(4) 3.78-litre Bottles	115.00
OEZ30	EA	113-litre Drum*	807.20
OEZ55	EA	208-litre Drum*	1,413.05
OEZ27	EA	1,041-litre Tote*	7,024.20

● OE 5W-20

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1[®] Gen 2 • Ford WSS-M2C930-A, WSS-M2C945-A, WSS-M2C945-B1 • Chrysler MS-6395 • ACEA A1/B1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
OEMQTC	EA	(1) 946-ml Bottle	7.75
OEMQTC	CA	(12) 946-ml Bottles	88.20
OEM1GC	EA	(1) 3.78-litre Bottle	30.20
OEM1GC	CA	(4) 3.78-litre Bottles	115.00
OEM30	EA	113-litre Drum*	807.20
OEM55	EA	208-litre Drum*	1,413.05
OEM27	EA	1,041-litre Tote*	7,024.20

● OE 5W-30

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM dexos1[®] Gen 2 • Ford WSS-M2C929-A, WSS-M2C946-A, WSS-M2C946-B1 • Chrysler MS-6395 • ACEA A1/B1, A5/B5 • Honda HTO-06

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
OEFQTC	EA	(1) 946-ml Bottle	7.75
OEFQTC	CA	(12) 946-ml Bottles	88.20
OEF1GC	EA	(1) 3.78-litre Bottle	30.20
OEF1GC	CA	(4) 3.78-litre Bottles	115.00
OEF30	EA	113-litre Drum*	807.20
OEF55	EA	208-litre Drum*	1,413.05
OEF27	EA	1,041-litre Tote*	7,024.20

● OE 10W-30

Use in vehicles that require API SP (Resource Conserving), SN PLUS, SN... • ILSAC GF-6A, GF-5, GF-4... • GM 4718M, 6094M • Ford WSS-M2C205-A • Chrysler MS-6395 • ACEA A1/B1, A5/B5

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
OETQTC	EA	(1) 946-ml Bottle	7.75
OETQTC	CA	(12) 946-ml Bottles	88.20
OET30	EA	113-litre Drum*	807.20
OET55	EA	208-litre Drum*	1,413.05
OET27	EA	1,041-litre Tote*	7,024.20

*Not stocked in all distribution centers. Call for availability.

How Do AMSOIL Products Stand Up?

Diesel Vehicles

MORE BUILT-IN PROTECTION

Detroit Diesel,** a leader in diesel engine technology, sets a standard for measuring cylinder liner and ring wear with its DD13 Scuffing Test for the DFS 93K222 specification. The test simulates real-world use with a modified Detroit Diesel DD13 diesel engine. Cylinder liner scuffing and top ring wear are measured and used oil analysis is performed to determine wear levels during the test.

Third-party testing shows **AMSOIL Heavy-Duty Synthetic Diesel Oil delivers 4X more protection against wear than required by Detroit Diesel's standard¹**. For even greater protection, **Signature Series Max-Duty Synthetic Diesel Oil provides 6X more wear protection than required by the standard²**.

¹Based on third-party testing in the Detroit Diesel DD13 Scuffing Test for specification DFS 93K222 using 10W-30 as worst-case representation. ²Based on third-party testing in the Detroit Diesel DD13 Scuffing Test for specification DFS 93K222 using 5W-30 as worst-case representation.

AMSOIL Fights Wear

AMSOIL delivers **powerful engine protection**. How good is it? In third-party testing compared to a leading brand, AMSOIL provided long-lasting wear protection, **keeping cylinder liners looking like new**.^{DD}



^{DD}Based on third-party testing of AMSOIL 5W-30 Signature Series Max-Duty Synthetic Diesel Oil and a leading conventional 15W-40 diesel oil using the Detroit Diesel[®] DD13 Scuffing test for specification DFS 93K222.





Keeps Turbos Clean


Signature Series Max-Duty Synthetic Diesel Oil provides protection boosted to the max, delivering up to **60% better turbo cleanliness^J** and withstanding the extra demands you place on the turbo when pulling heavy loads or updating the tune for maximum horsepower.

^JBased on specification standards of CAT C13 2nd Ring Top Land Carbon testing.

Protects Against Rust

Signature Series Max-Duty Synthetic Diesel Oil provides up to **2X better rust protection.^K**


Test results describe and represent properties of oils that were acquired on the dates listed in Table 1 (see AMSOIL.com/rusttest.aspx). Results do not apply to any subsequent reformulations of such oils or to new oils introduced after completion of testing. All oils were available to consumers at the time of purchase. Testing was completed in November 2017.

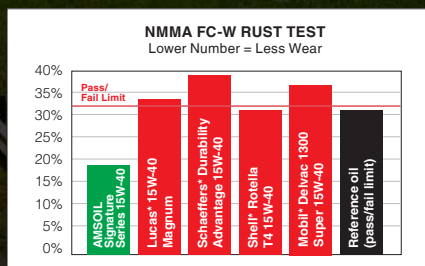

^KBased on industry standard testing using the NMMA FC-W Rust Test.

Reduces Oil Consumption

Heavy-Duty Synthetic Diesel Oil provides up to **66% less** oil consumption, while Signature Series Max-Duty Synthetic Diesel Oil provides up to **76% less** oil consumption.^L

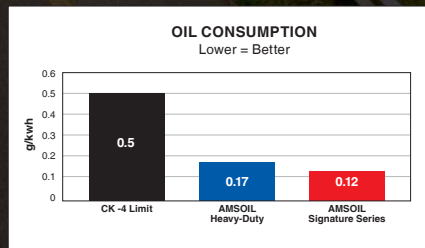

^LThan required by the API CK-4 standard in the Caterpillar-1N oil consumption test.



MORE BUILT-IN PROTECTION

Third-party testing shows our Heavy-Duty Synthetic Diesel Oil delivers 4X more protection against wear than required by Detroit Diesel's** standard¹. For even greater protection, Signature Series Max-Duty Synthetic Diesel Oil provides 6X more wear protection than required by the standard².

Not stocked in all distribution centers. Call for availability.



Signature Series Max-Duty Synthetic Diesel Oil

The top tier of AMSOIL protection and performance for diesel engines. Provides 6X more engine protection than required by the Detroit Diesel DD13 Scuffing Test for Specification DFS 93K222².

● 5W-30

Use in vehicles that require API CK-4/SN, SN PLUS, CJ-4, CI-4+, CF, ACEA E9, E7, E6 · Mack EOS-4.5, EO-O · Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.51, 228.31 · MTU Type 3.1, 2.1, II, I · MAN 3677, 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC IV-10 LA, DQC III-10 LA · Scania LA-2 · Chrysler MS 10902 · Ford WSS-M2C114-B1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
DHDQT	EA	(1) 946-ml Bottle	12.45
DHDQT	CA	(12) 946-ml Bottles	142.20
DHD1G	EA	(1) 3.78-litre Bottle	48.80
DHD1G	CA	(4) 3.78-litre Bottles	185.80
DHD30	EA	113-litre Drum*	1,273.60
DHD55	EA	208-litre Drum*	2,267.15
DHD27	EA	1,041-litre Tote*	11,293.65

● 10W-30

Use in vehicles that require API CK-4/SN, CJ-4, CI-4+, CF · Volvo VDS4.5, VDS4, VDS3 · Mack EOS-4.5, EO-O · Renault RLD-4, RLD-3 · Cummins CES20086, CES20081 · Caterpillar ECF-2, ECF-3, ECF-1-a · Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 · ACEA E9, E7 · MB 228.31 · MAN 3575 · MTU Type 2.1, II, I · JASO DH-2 · Deutz DQC III-10 LA · Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
DTT1GC	EA	(1) 3.78-litre Bottle	46.80
DTT1GC	CA	(4) 3.78-litre Bottles	178.20
DTT55	EA	208-litre Drum*	2,164.85

● 0W-40

Delivers 4X better cold-temperature performance^{EE}

Use in vehicles that require API CK-4/SN, CJ-4, CI-4+, CF · ACEA E9, E7 · Mack EOS-4.5, EO-O · Detroit Diesel DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Chrysler MS 10902 · Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
DZFQT	EA	(1) 946-ml Bottle	12.35
DZFQT	CA	(12) 946-ml Bottles	141.00
DZF1G	EA	(1) 3.78-litre Bottle	48.30
DZF1G	CA	(4) 3.78-litre Bottles	184.00
DZF55	EA	208-litre Drum*	2,243.50

● 5W-40

Use in vehicles that require API CK-4/SN, CJ-4, CI-4+, CF, CF-2 · ACEA E9, E7 · Mack EOS-4.5, EO-O · Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.31 · MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Allison TES-439 · Scania LA-2 · Chrysler MS 10902 · Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
DEOQT	EA	(1) 946-ml Bottle	12.20
DEOQT	CA	(12) 946-ml Bottles	139.20
DEO1GC	EA	(1) 3.78-litre Bottle	47.70
DEO1GC	CA	(4) 3.78-litre Bottles	181.60
DEOTPC	EA	(1) 9.45-litre Bottle	117.80
DEOTPC	CA	(2) 9.45-litre Bottles	224.30
DEO30	EA	113-litre Drum*	1,245.15
DEO55	EA	208-litre Drum*	2,215.35
DEO27	EA	1,041-litre Tote*	11,034.40

● 15W-40

Use in vehicles that require API CK-4/SN, CJ-4, CI-4+, CF, CF-2 · ACEA E9, E7 · Mack EOS-4.5, EO-O · Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214 · Caterpillar ECF-3, ECF-2, ECF-1-a · Cummins CES20086, CES20081 · Volvo VDS-4.5, VDS-4, VDS-3 · MB 228.31 · MTU Type 2.1, II, I · MAN 3575 · JASO DH-2 · Renault RLD-4, RLD-3 · Deutz DQC III-10 LA · Allison TES-439 · Scania LA-2 · Chrysler MS 10902 · Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
DMEQTC	EA	(1) 946-ml Bottle	12.00
DMEQTC	CA	(12) 946-ml Bottles	136.80
DME1GC	EA	(1) 3.78-litre Bottle	46.80
DME1GC	CA	(4) 3.78-litre Bottles	178.20
DMETPC	EA	(1) 9.45-litre Bottle	115.40
DMETPC	CA	(2) 9.45-litre Bottles	219.80
DME30	EA	113-litre Drum*	1,217.25
DME55	EA	208-litre Drum*	2,164.05
DME27	EA	1,041-litre Tote*	10,780.15

¹Based on third-party testing in the Detroit Diesel DD13 Scuffing Test for specification DFS 93K222 using 10W-30 as worst-case representation. ²Based on third-party testing in the Detroit Diesel DD13 Scuffing Test for specification DFS 93K222 using 5W-30 as worst-case representation. ^{EE}When compared to SAE 15W-40 oil in ASTM D5293 Cold Cranking Viscosity test.

Heavy-Duty Synthetic Diesel Oil

Outstanding protection and performance for customers seeking an upgrade over conventional and other synthetic diesel oils. Provides 4X more engine protection than required by the Detroit Diesel** DD13 Scuffing Test for Specification DFS 93K222.¹

● 10W-30

Use in vehicles that require API CK-4, CJ-4, CI-4+, CF, ACEA E9, E7, Mack EOS-4.5, EO-O, Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214, Caterpillar ECF-3, ECF-2, ECF-1a, Cummins CES20086, CES20081, Volvo VDS-4.5, VDS-4, VDS-3, MB 228.31, MTU Type 21, II, I, MAN 3575, JASO DH-2, Renault RLD-4, RLD-3, Deutz DDC III-10 LA, Allison TES-439, Chrysler MS 10902, Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ADNQT	EA	(1) 946-ml Bottle	8.35
ADNQT	CA	(12) 946-ml Bottles	95.40
ADNTPC	EA	(1) 9.45-litre Bottle	79.65
ADNTPC	CA	(2) 9.45-litre Bottles	151.70
ADN55	EA	208-litre Drum*	1,564.30
ADN27	EA	1,041-litre Tote*	7,778.20

● 5W-40

Use in vehicles that require API CK-4, CJ-4, CI-4+, CF, CF-2, ACEA E9, E7, Mack EOS-4.5, EO-O, Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214, Caterpillar ECF-3, ECF-2, ECF-1a, Cummins CES20086, CES20081, Volvo VDS-4.5, VDS-4, VDS-3, MB 228.31, MTU Type 21, II, I, MAN 3575, JASO DH-2, Renault RLD-4, RLD-3, Deutz DDC III-10 LA, Allison TES-439, Chrysler MS 10902, Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ADOQT	EA	(1) 946-ml Bottle	8.75
ADOQT	CA	(12) 946-ml Bottles	99.60
ADO1GC	EA	(1) 3.78-litre Bottle	33.90
ADO1GC	CA	(4) 3.78-litre Bottles	129.00
ADOTPC	EA	(1) 9.45-litre Bottle	83.25
ADOTPC	CA	(2) 9.45-litre Bottles	158.50
ADO30	EA	113-litre Drum*	927.25
ADO55	EA	208-litre Drum*	1,633.35
ADO27	EA	1,041-litre Tote*	8,125.75

● 15W-40

Use in vehicles that require API CK-4, CJ-4, CI-4+, CF, CF-2, ACEA E9, E7, Mack EOS-4.5, EO-O, Detroit Diesel DFS 93K222, DDC 93K218, 93K215, 93K214, Caterpillar ECF-3, ECF-2, ECF-1a, Cummins CES20086, CES20081, Volvo VDS-4.5, VDS-4, VDS-3, MB 228.31, MTU Type 21, II, I, MAN 3575, JASO DH-2, Renault RLD-4, RLD-3, Deutz DDC III-10 LA, Allison TES-439, Chrysler MS 10902, Ford WSS-M2C171-F1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ADPQT	EA	(1) 946-ml Bottle	8.35
ADPQT	CA	(12) 946-ml Bottles	95.40
ADP1GC	EA	(1) 3.78-litre Bottle	32.50
ADP1GC	CA	(4) 3.78-litre Bottles	123.80
ADPTPC	EA	(1) 9.45-litre Bottle	79.60
ADPTPC	CA	(2) 9.45-litre Bottles	151.60
ADP30	EA	113-litre Drum*	889.20
ADP55	EA	208-litre Drum*	1,564.30
ADP27	EA	1,041-litre Tote*	7,779.35

100% Synthetic Diesel Oil

Provides outstanding protection, performance and fuel economy for smaller American diesel pickups, vans, cars and SUVs. Delivers up to 6X better wear protection than required by a leading industry standard.²

● 0W-20

Use in vehicles that require GM dexosD

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
DP020QT	EA	(1) 946-ml Bottle	10.80
DP020QT	CA	(12) 946-ml Bottles	123.00

● 5W-30

Use in vehicles that require GM dexosD, dexos2 • Chrysler MS-11106 • Ford WSSM2C214-B1 • ACEA C3

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
DP530QT	EA	(1) 946-ml Bottle	10.75
DP530QT	CA	(12) 946-ml Bottles	122.40

ADN



ADO



ADP



DP020



DP530



¹Based on independent testing in the Detroit Diesel DD13 Scuffing Test for specification DFS 93K222 using 10W-30 as worst-case representation.

²Based on third-party testing in the OM646LA cam wear test using 0W-20 as worst-case representation.

Like Series 3000?

Try Signature Series Max-Duty 5W-30 for a serious upgrade. See page 25.



HDD



AME



AMO



ARO

CI-4+ Synthetic Diesel Oils

Provide outstanding protection for on- and off-road diesel applications not equipped with diesel particulate filters (DPFs), where extra TBN is desired for long service intervals.

● Series 3000 5W-30 Synthetic Heavy Duty Diesel Oil

Use in vehicles that require API CI-4+/CI-4/CH-4/CF/CF-2/SL/SJ • Global DHD-1 • ACEA A3/B3, E2, E3, E5, E7 • JASO DH-1 • Mack EO-M, EO-N • DDC 93K214 • Caterpillar ECF-1-a, ECF-2 • Cummins CES 20076, 20077, 20078 • Volvo VDS-3, VDS-2 • MB 228.1, 228.3, 229.1 • MAN 271, 3275 • MTU Type II

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
HDDQTC	EA	(1) 946-ml Bottle	13.55
HDDQTC	CA	(12) 946-ml Bottles	154.80
HDD1GC	EA	(1) 3.78-litre Bottle	52.75
HDD1GC	CA	(4) 3.78-litre Bottles	200.80
HDD30	EA	113-litre Drum*	1,417.30
HDD55	EA	208-litre Drum*	2,533.60
HDD27	EA	1,041-litre Tote*	12,631.80

● 15W-40 Synthetic Heavy Duty Diesel and Marine Oil

Use in vehicles that require API CI-4+/CI-4/CH-4/CF/CF-2/SL/SJ • Global DHD-1 • ACEA A3/B3, E2, E3, E5, E7 • JASO DH-1 • Mack EO-M, EO-N • DDC 93K214 • Caterpillar ECF-1-a, ECF-2 • Cummins CES 20076, 20077, 20078 • Volvo VDS-3, VDS-2 • MB 228.1, 228.3, 229.1 • MAN 271, 3275 • MTU Type II

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
AMEQTC	EA	(1) 946-ml Bottle	12.55
AMEQTC	CA	(12) 946-ml Bottles	143.40
AME1GC	EA	(1) 3.78-litre Bottle	49.00
AME1GC	CA	(4) 3.78-litre Bottles	186.60
AMETPC	EA	(1) 9.45-litre Bottle	121.00
AMETPC	CA	(2) 9.45-litre Bottles	230.40
AME30	EA	113-litre Drum*	1,308.80
AME55	EA	208-litre Drum*	2,334.60
AME27	EA	1,041-litre Tote*	11,636.40

Premium Protection Synthetic Motor Oil

Ideal for gasoline engines and diesel applications not equipped with diesel particulate filters (DPF), where the extra protection of a high-zinc and TBN formula is desired.

● 10W-40

Use in vehicles that require API CI-4+/CI-4/CH-4/CF/CF-2/SL/SJ/SH/SG • ISO-L-EMA • Caterpillar ECF-1 • JASO MA (Motorcycle) • MAN 271/3275 • MTU Type 2 • Cummins 20071/20072/20076/20077 • Volvo, VDS-2, VDS • Mack EO-M, EO-M • ACEA A3/B3/E3/E5 • MB 228.1, 228.3, 229.1 • Detroit Diesel 93K214

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
AMOQTC	EA	(1) 946-ml Bottle	12.45
AMOQTC	CA	(12) 946-ml Bottles	142.20
AMOTP	EA	(1) 9.45-litre Bottle	119.65
AMOTP	CA	(2) 9.45-litre Bottles	227.90
AMO30	EA	113-litre Drum*	1,292.55
AMO55	EA	208-litre Drum*	2,303.40

● 20W-50

Use in vehicles that require API CI-4+/CI-4/CH-4/CF/CF-2/SL/SJ/SH/SG • ISO-L-EMA • Caterpillar ECF-1 • JASO MA (Motorcycle) • MAN 271/3275 • MTU Type 2 • Cummins 20071/20072/20076/20077 • Volvo, VDS-2, VDS • Mack EO-M, EO-M • ACEA A3/B3/E3/E5 • MB 228.1, 228.3, 229.1 • Detroit Diesel 93K214

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
AROQTC	EA	(1) 946-ml Bottle	12.45
AROQTC	CA	(12) 946-ml Bottles	142.20
ARO16	EA	61-litre Keg*	723.45
ARO30	EA	113-litre Drum*	1,293.90
ARO55	EA	208-litre Drum*	2,305.10
ARO27	EA	1,041-litre Tote*	11,482.75

*Not stocked in all distribution centers. Call for availability.

Oil Filters

AMSOIL Oil Filters rank among the highest efficiency filters available to the auto/light-truck and powersports markets, providing a filtering efficiency of 99 percent at 20 microns. Featuring advanced full-synthetic technology, AMSOIL Oil Filters provide greater efficiency, capacity and durability than cellulose filters, extending engine and filter life and reducing engine wear. Easy-grip coating eases the job of tightening and loosening filters. Call 1-800-777-7094 (Monday-Friday, 7 a.m. - 7 p.m. Central Time) or look up your vehicle at AMSOIL.ca to determine the appropriate filter for each application.



Oil Filters

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE	STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
EA15K01	EA	1 Filter	22.20	EA15K29	CA	12 Filters	222.60
EA15K01	CA	12 Filters	247.80	EA15K32	EA	1 Filter	19.60
EA15K02	EA	1 Filter	22.55	EA15K32	CA	12 Filters	219.00
EA15K02	CA	12 Filters	251.40	EA034	EA	1 Filter	20.45
EA15K03	EA	1 Filter	20.75	EA034	CA	12 Filters	228.60
EA15K03	CA	12 Filters	231.60	EA15K35	EA	1 Filter	19.55
EA15K04	EA	1 Filter	21.55	EA15K35	CA	12 Filters	218.40
EA15K04	CA	12 Filters	240.60	EA15K37	EA	1 Filter	16.95
EA15K05	EA	1 Filter	20.90	EA15K37	CA	12 Filters	189.00
EA15K05	CA	12 Filters	233.40	EA15K38	EA	1 Filter	17.25
EA15K06	EA	1 Filter	18.25	EA15K38	CA	12 Filters	192.60
EA15K06	CA	12 Filters	203.40	EA15K39	EA	1 Filter	26.20
EA15K07	EA	1 Filter	15.60	EA15K39	CA	12 Filters	292.20
EA15K07	CA	12 Filters	174.00	EA042	EA	1 Filter	19.90
EA15K08	EA	1 Filter	22.90	EA042	CA	12 Filters	222.60
EA15K08	CA	12 Filters	255.60	EA15K43	EA	1 Filter	22.20
EA15K09	EA	1 Filter	20.70	EA15K43	CA	12 Filters	247.80
EA15K09	CA	12 Filters	231.00	EA15K49	EA	1 Filter	29.85
EA011	EA	1 Filter	19.25	EA15K49	CA	6 Filters	167.40
EA011	CA	12 Filters	214.80	EA15K50	EA	1 Filter	18.20
EA15K12	EA	1 Filter	18.70	EA15K50	CA	12 Filters	203.40
EA15K12	CA	12 Filters	209.40	EA15K51	EA	1 Filter	18.70
EA15K13	EA	1 Filter	19.65	EA15K51	CA	12 Filters	208.80
EA15K13	CA	12 Filters	219.60	EA052	EA	1 Filter	20.70
EA015	EA	1 Filter	20.60	EA052	CA	12 Filters	231.60
EA015	CA	12 Filters	230.40	EA15K53	EA	1 Filter	19.25
EA15K16	EA	1 Filter	19.55	EA15K53	CA	12 Filters	214.80
EA15K16	CA	12 Filters	218.40	EA15K54	EA	1 Filter	25.20
EA017	EA	1 Filter	18.90	EA15K54	CA	12 Filters	281.40
EA017	CA	12 Filters	211.20	EA055	EA	1 Filter	33.15
EA15K19	EA	1 Filter	19.60	EA055	CA	12 Filters	370.20
EA15K19	CA	12 Filters	218.40	EA059	EA	1 Filter	20.10
EA15K20	EA	1 Filter	20.55	EA059	CA	12 Filters	225.00
EA15K20	CA	12 Filters	229.20	EA064	EA	1 Filter	19.10
EA023	EA	1 Filter	19.25	EA064	CA	12 Filters	214.20
EA023	CA	12 Filters	215.40	EA080	EA	1 Filter	22.05
EA024	EA	1 Filter	20.80	EA080	CA	12 Filters	246.60
EA024	CA	12 Filters	232.20	EA15K88	EA	1 Filter	40.45
EA026	EA	1 Filter	22.55	EA15K88	CA	12 Filters	451.80
EA026	CA	12 Filters	252.60	EA098	EA	1 Filter	35.80
EA15K28	EA	1 Filter	20.55	EA098	CA	12 Filters	399.60
EA15K28	CA	12 Filters	229.80	EA099	EA	1 Filter	37.15
EA15K29	EA	1 Filter	19.90	EA099	CA	6 Filters	207.60



Heavy-Duty Extended-Life Oil Filters

Provide excellent 99 percent filtering efficiency and high contaminant capacity for heavy-duty on- and off-road diesel and gasoline applications. Provide extended service intervals that coincide with the maximum drain intervals of AMSOIL synthetic motor oils.

Bypass Filters

High-efficiency bypass filters effectively remove minute dirt particles and soot far beyond standard oil filters.



EZT



AFE



EFO



AEL



AFL



EFM

Synthetic European Motor Oil

Specially formulated for the lubrication needs of European gasoline and diesel cars and light trucks.

● 0W-20 LS-VW

Use in vehicles that require API SN-PLUS, SN... • ACEA C5 • VW 508.00/509.00

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
EZTQT	EA	(1) 946-ml Bottle	12.50
EZTQT	CA	(12) 946-ml Bottles	142.80

● 0W-20 LS

Use in vehicles that require API SN-PLUS (Resource Conserving), SN, SM...
• ILSAC GF-5 • ACEA C5 • A1/B1 • BMW LL-17FE+ • MB 229.71 • Ford WSS-M2C947-B1 • Opel/Vauxhall OV0401547 • Fiat 9.55535-GSX • Chrysler MS-12145 • Volvo VCC RBS0-2AE

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
AFEQT	EA	(1) 946-ml Bottle	11.80
AFEQT	CA	(12) 946-ml Bottles	134.40

● 0W-40 FS

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN/SM... • BMW LL-01 • MB 229.1/229.3/229.5 • Porsche A40 • Renault 0710, 0700 • VW/Audi 502.00/505.00

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
EFOQT	EA	(1) 946-ml Bottle	11.50
EFOQT	CA	(12) 946-ml Bottles	131.40

● 5W-30 LS

Manufacturer Approvals: VW 504.00/507.00

Use in vehicles that require API SN • ACEA C3 • GM dexos2 • Chrysler MS-11106 • MB 229.51 • BMW LL-04 • Porsche C30

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
AELQC	EA	(1) 946-ml Bottle	14.05
AELQC	CA	(12) 946-ml Bottles	160.20
AEL30	EA	113-litre Drum*	1,477.50
AEL55	EA	208-litre Drum*	2,641.35

● 5W-40 MS

Manufacturer Approvals: MB-Approval 229.51 • Porsche A40

Use in vehicles that require ACEA C3 • API SN/SM/CF... • BMW LL-04 • Chrysler MS-10850 (supersedes MS-10896) • Ford WSS-M2C917-A • GM dexos2 (supersedes LL-A-025 and LL-B-025) • Renault RN0700/RN0710 • VW/Audi 502.00/505.01

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
AFLQC	EA	(1) 946-ml Bottle	12.35
AFLQC	CA	(12) 946-ml Bottles	141.00
AFL1GC	EA	(1) 3.78-litre Bottle	47.95
AFL1GC	CA	(4) 3.78-litre Bottles	182.60
AFL30	EA	113-litre Drum*	1,277.75
AFL55	EA	208-litre Drum*	2,274.70
AFL27	EA	1,041-litre Tote*	10,912.40

● 5W-40 FS

Manufacturer Approvals: MB-Approval 229.5 • Porsche A40 • VW/Audi 502.00/505.00

Use in vehicles that require ACEA A3/B3, A3/B4 • API SN/SM... • BMW LL-01 • Renault 0710, 0700 • Opel GM LL-B-025

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
EFMQTC	EA	(1) 946-ml Bottle	9.25
EFMQTC	CA	(12) 946-ml Bottles	105.60
EFM1GC	EA	(1) 3.78-litre Bottle	36.20
EFM1GC	CA	(4) 3.78-litre Bottles	137.80
EFM30	EA	113-litre Drum*	996.15
EFM55	EA	208-litre Drum*	1,761.50
EFM27	EA	1,041-litre Tote*	8,771.35

Tough-to-reach fill hole?

Order a flexible pour spout with your oil to make the job easier. Fits quarts and gallons.

STOCK#	CAN. WHOLESALE
G1230	1.00

¹³See page 47 for Proposition 65 information for this product.
*Not stocked in all distribution centers. Call for availability.

Signature Series Synthetic ATF

Provides reserve protection in fleet vehicles, heavy-duty pickups, work trucks and other severe-service applications that quickly break down other lubricants.

ATF



ATL



● Multi-Vehicle

Use in applications that require Allison C-4, TES-389 - BMW 7045E, 8072B, LA 2634, LT 71141 - Chrysler ATF+4, Mopar ASRC, 68089195AA, 68049954AA - Ford MERCON, MERCON V, ESP-M2C166-H, FNR5, M2C924-A, XL-12 - GM DEXRON II, DEXRON III, AutoTrak II - Honda/Acura ATF-Z1 - Hyundai/Kia SP-II, SP-III, Red-1 - IDEMITSU K17 - JASO 1A - JWS 3309, 3314, 3317 - MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339 Type Z-3, 339F - Mazda ATF-M III, ATF-MV, F-1 - Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81, 236.91 - Mitsubishi SP-II, SP-III, ATF-J2 - Nissan Matic-D, Matic-J, Matic-K, 402 - Saab 3309 - Shell 3403, LA 2634 - Subaru ATF, ATF-HP - Suzuki 3314, 3317 - Texaco ETL-7045E, ETL-8072B, N402 - Toyota Type T, T-II, T-III, T-IV - Voith 55.6335, 55.6336 - Volvo 97340, 97341 - VW/Audi G 052 162, G 052 990, G 055 025 - ZF TE-ML 03D, 04D, 05L, 09, 11A, 11B, 14A, 14B, 14C, 16L, 16M, 17C, 20B, 20C, 21L

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ATFQTC	EA	(1) 946-ml Bottle	14.95
ATFQTC	CA	(12) 946-ml Bottles	170.40
ATFPK	EA	(1) 946-ml Easy-Pack	16.80
ATFPK	CA	(12) 946-ml Easy-Packs	192.00
ATFTPC	EA	(1) 9.45-litre Bottle	144.30
ATFTPC	CA	(2) 9.45-litre Bottles	274.80
ATF16	EA	61-litre Keg*	874.00
ATF30	EA	113-litre Drum*	1,573.60
ATF55	EA	208-litre Drum*	2,816.95
ATF27	EA	1,041-litre Tote*	14,040.65

● Fuel-Efficient

Engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

Use in applications that require Aisin-Warner AW-1 - BMW 83 22 0 142 516, 83 22 2 152 426 - Chrysler Mopar 68157995A, 68218925AB, SP-IV - DSIH 6p805 - Ford MERCON LV, SP, ULV - GM DEXRON HP, DEXRON VI, DEXRON ULV - Honda/Acura DW-1, Type 3.0 - Hyundai/Kia SP-IV, SPH-IV, SP-IV-RR, NWS-9638, SP4-M - JASO 1A-LV - JWS 3324 - Mazda ATF FZ - Mercedes Benz 236.12, 236.14, 236.15, 236.41 - Mitsubishi SP-IV, ATF-J3, ATF-PA, ATF-MA1 - Nissan Matic-S, Matic-W - Saab 93 165 147 - Shell M-1375.4, M-1375.5, M-1375.6, M-L 12108 - Toyota WS - Volvo 31256774 - VW/Audi G 055 005, G 055 162, G 060 162 - ZF S671 000 255

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ATLQTC	EA	(1) 946-ml Bottle	15.35
ATLQTC	CA	(12) 946-ml Bottles	175.20
ATLPK	EA	(1) 946-ml Easy-Pack	17.45
ATLPK	CA	(12) 946-ml Easy-Packs	199.20
ATLTPC	EA	(1) 9.45-litre Bottle	147.80
ATLTPC	CA	(2) 9.45-litre Bottles	281.50
ATL30	EA	113-litre Drum*	1,614.95
ATL55	EA	208-litre Drum*	2,893.60

Oil Analyzers

AMSOIL offers oil analysis service options from Oil Analyzers Inc.® By analyzing used engine oil, a qualified lab can detect mechanical problems your equipment may have developed. For more information, visit www.oiltesting.com.

STOCK#	PKG./SIZE	CAN. WHOLESALE
KIT401	OAI UPS Pre-Paid Kit	49.55
KIT402	OAI Non-Postage-Paid Kit	30.90
G1206	Oil Suction Pump w/10-ft. hose	33.00
G1571	Replacement Hose 25-ft.	10.45

OE Synthetic ATF

Resists wear and provides smooth shifts in passenger car/light truck automatic transmissions.



● Multi-Vehicle

Use in applications that require Allison C-4, TES-389 - BMW 7045E, 8072B, LA 2634, LT 71141 - Chrysler ATF+4*, Mopar ASRC, 68089195AA, 68049954AA - Ford MERCON, MERCON V, ESP-M2C166-H, FNR5, M2C924-A, XL-12 - GM DEXRON II, DEXRON III, AutoTrak II - Honda/Acura ATF-Z1 - Hyundai/Kia SP-II, SP-III, Red-1 - IDEMITSU K17 - JASO 1A - JWS 3309, 3314, 3317 - MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339F - Mazda ATF-M III, ATF-MV, F-1 - Mercedes Benz 236.1, 236.2, 236.3, 236.5, 236.6, 236.7, 236.9, 236.10, 236.11, 236.81, 236.91 - Mitsubishi SP-II, SP-III, ATF-J2 - Nissan Matic-D, Matic-J, Matic-K, 402 - Saab 3309 - Shell 3403, LA 2634 - Subaru ATF, ATF-HP - Suzuki 3314, 3317 - Texaco ETL-7045E, ETL-8072B, N402 - Toyota Type T, T-II, T-III, IV - Voith 55.6335, 55.6336 - Volvo 97340, 97341 - VW/Audi G 052 162, G 052 990, G 055 025 - ZF TE-ML 03D, 04D, 05L, 09, 11A, 11B, 14A, 14B, 16L, 17C, 20B, 21L

*AMSOIL warrants the use of this product for Chrysler ATF+4 applications above -38°F. Product does not meet the cold temperature requirement of ATF+4 at -40°F. For warranty information, visit www.amsoil.com/warranty.aspx.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
OTFQTC	EA	(1) 946-ml Bottle	9.70
OTFQTC	CA	(12) 946-ml Bottles	110.40
OTFTFP	EA	(1) 9.45-litre Bottle	92.75
OTFTFP	CA	(2) 9.45-litre Bottles	176.60
OTF30	EA	113-litre Drum*	1,039.75
OTF55	EA	208-litre Drum*	1,837.90
OTF27	EA	1,041-litre Tote*	9,147.85



● Fuel-Efficient

Engineered to exceed the requirements of original equipment manufacturers (OEMs) specifying low-viscosity oil.

Use in applications that require Aisin-Warner AW-1 - BMW 83 22 0 142 516, 83 22 2 152 426 - Chrysler Mopar 68157995A, 68218925AB, SP-IV - DSIH 6p805 - Ford MERCON LV - GM DEXRON VI - Honda/Acura DW-1, Type 3.0 - Hyundai/Kia SP-IV, SPH-IV, SP-IV-RR, NWS-9638, SP4-M - JASO 1A-LV - JWS 3324 - Mazda ATF FZ - Mercedes Benz 236.12, 236.14, 236.15, 236.41 - Mitsubishi SP-IV, ATF J3, ATF-PA, ATF-MA1 - Nissan Matic-S, Matic-W - Saab 93 165 147 - Shell M-1375.4, M-1375.5, M-1375.6, M-L12108 - Toyota WS - Volvo 31256774 - VW/Audi G 055 005, G 055 162, G 060 162 - ZF S671 090 255

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
OTLQTC	EA	(1) 946-ml Bottle	9.80
OTLQTC	CA	(12) 946-ml Bottles	111.60
OTLTP	EA	(1) 9.45-litre Bottle	94.10
OTLTP	CA	(2) 9.45-litre Bottles	179.20
OTL30	EA	113-litre Drum*	1,054.95
OTL55	EA	208-litre Drum*	1,867.10



● Torque-Drive® Synthetic Heavy-Duty ATF

Premium fluid designed for use in both on- and off-highway heavy-duty equipment.

Use in transmissions that require Allison C-4, TES-295, TES-389; Ford MERCON® V; GM DEXRON® III; Isuzu SCS; MAN 339 Type V-1, 339 Type V-2, 339 Type Z-1, 339 Type Z-2, 339 Type Z-3, 339F; MB 236.91, 236.10; Voith 55.6335, 55.6336; Volvo 97340, 97341; ZF TE-ML 03D, TE-ML 04D, TE-ML 14A, TE-ML 14B, TE-ML 14C, TE-ML 17C, TE-ML 20B, TE-ML 20C

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ATD1GC	EA	(1) 3.78-litre Bottle	59.95
ATD1GC	CA	(4) 3.78-litre Bottles	228.20
ATD16	EA	61-litre Keg*	896.70
ATD30	EA	113-litre Drum*	1,620.50
ATD55	EA	208-litre Drum*	2,906.10
ATD27	EA	1,041-litre Tote*	14,494.20

*Not stocked in all distribution centers. Call for availability.

SVG



AGL



SVT



SVO



ADA



SEVERE GEAR® Synthetic Gear Lube

Specifically engineered for high-demand applications, including trailer towing, heavy hauling, 4x4 off-road driving, commercial use and racing. Flexible easy-pack helps you access tough-to-reach fill holes and eliminates the need for a pump. Delivers 20% more cold-temperature protection than required by ASTM D2983.

● 75W-90

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
SVGQTC	EA	(1) 946-ml Bottle	17.80
SVGQTC	CA	(12) 946-ml Bottles	203.40
SVGPK	EA	(1) 946-ml Easy-Pack	17.80
SVGPK	CA	(12) 946-ml Easy-Packs	203.40
SVG05	EA	(1) 18.9-litre Pail	331.95
SVG16	EA	61-litre Keg*	1,051.65
SVG30	EA	113-litre Drum*	1,918.90
SVG55	EA	208-litre Drum*	3,445.95

○ 80W-90

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	U.S. WHOLESALE
AGLQT	EA	(1) 946-ml Bottle	13.15
AGLQT	CA	(12) 946-ml Bottles	150.00
AGLPK	EA	(1) 946-ml Easy-Pack	15.10
AGLPK	CA	(12) 946-ml Easy-Packs	172.20
AGL05	EA	(1) 18.9-litre Pail	240.15
AGL16	EA	61-litre Keg*	757.85
AGL30	EA	113-litre Drum*	1,367.90
AGL55	EA	208-litre Drum*	2,435.85
AGL27	EA	1,041-litre Tote*	12,143.05

● 75W-110

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
SVTQT	EA	(1) 946-ml Bottle	18.05
SVTQT	CA	(12) 946-ml Bottles	205.80
SVTPK	EA	(1) 946-ml Easy-Pack	20.15
SVTPK	CA	(12) 946-ml Easy-Packs	229.80
SVT05	EA	(1) 18.9-litre Pail	334.60
SVT16	EA	61-litre Keg*	1,060.15
SVT30	EA	113-litre Drum*	1,934.75
SVT55	EA	208-litre Drum*	3,475.05

● 75W-140

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 234 (Eaton PS-037)

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
SVOQTC	EA	(1) 946-ml Bottle	20.45
SVOQTC	CA	(12) 946-ml Bottles	233.40
SVOPK	EA	(1) 946-ml Easy-Pack	20.45
SVOPK	CA	(12) 946-ml Easy-Packs	233.40
SVO05	EA	(1) 18.9-litre Pail	373.55
SVO16	EA	61-litre Keg*	1,184.75
SVO30	EA	113-litre Drum*	2,168.40
SVO55	EA	208-litre Drum*	3,903.35
SVO27	EA	1,041-litre Tote*	19,480.45

● Slip Lock® Differential Additive

Designed to eliminate gear-housing chatter in cars, trucks and SUVs equipped with limited-slip differentials.

Note: AMSOIL synthetic gear lubes do not require the use of this additive. However, not all differentials respond the same and if chatter is noticed, the addition of AMSOIL Slip Lock will eliminate it.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ADATBC	EA	(1) 118-ml Tube	10.00
ADATBC	CA	(12) 118-ml Tubes	114.00



ATH




FGR



FTF



G2039



G1230

G1242



G3721

● Synthetic Tractor/Hydraulic Transmission Oil

Formulated for combinations of transmission, hydraulic systems, final drives, power take-off systems and wet brakes in heavy-duty farm and industrial equipment as well as commercial and residential lawn tractors.

Use in hydraulic systems that require SAE 5W-30

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ATHQT	EA	(1) 946-ml Bottle	11.75
ATHQT	CA	(12) 946-ml Bottles	133.80
ATH05	EA	(1) 18.9-litre Pail	214.80
ATH30	EA	113-litre Drum*	1,215.55
ATH55	EA	208-litre Drum*	2,160.30
ATH27	EA	1,041-litre Tote*	10,761.60

● Long Life Synthetic Gear Lube

Specifically engineered for extended drain intervals up to 805,000 kilometers as set by equipment manufacturers for over-the-road trucks and heavy equipment.

● 75W-90

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 256 (Eaton PS-163)

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
FGRQC	EA	(1) 946-ml Bottle	15.05
FGRQC	CA	(12) 946-ml Bottles	171.60
FGR05	EA	(1) 18.9-litre Pail	276.15
FGR16	EA	61-litre Keg*	873.90
FGR30	EA	113-litre Drum*	1,581.90
FGR55	EA	208-litre Drum*	2,825.95
FGR27	EA	1,041-litre Tote*	14,086.60

80W-140

Use in differentials that require API GL-5/MT-1 • MIL-PRF-2105E • MACK GO-J • Dana SHAES 256 (Eaton PS-163)

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
FG005	EA	(1) 18.9-litre Pail	273.00
FG016	EA	61-litre Keg*	864.05
FG030	EA	113-litre Drum*	1,563.75
FG055	EA	208-litre Drum*	2,794.05
FG027	EA	1,041-litre Tote*	13,926.15

○ SAE 50 Long-Life Synthetic Transmission Oil

Specialty formulated for manual transmissions found in high-torque, heavy-duty line haul trucks and other commercial applications.

Use in manual transmissions that require Eaton PS-164 Rev. 7 • API GL-1 and MT-1 • Navistar/International TMS 6816 • Mack TO-A Plus • ZF Freedoline • Meritor O-81 • Rockwell/Eaton/Fuller CD-50 (PS-081)

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
FTF1G	EA	(1) 3.78-litre Bottle	55.35
FTF1G	CA	(4) 3.78-litre Bottles	210.80
FTF05	EA	(1) 18.9-litre Pail	260.80
FTF16	EA	61-litre Keg*	828.25
FTF55	EA	208-litre Drum*	2,670.95
FTF27	EA	1,041-litre Tote*	13,318.65

Easy Installation

PRODUCT	STOCK#	CAN. WHOLESALE
Hand Pump	G2039	13.00
Flexible Pour Spout	G1230	1.00
Nozzle Dispenser Caps (6)	G1242	1.50
FloTool Flexible Pour Spout	G3721	5.35

*Not stocked in all distribution centers. Call for availability.

GPOR1



GPOR2



GPTR1



GPTR2



GEC



Synthetic Polymeric Off-Road Grease

Extreme-pressure, moly-fortified grease that provides outstanding protection for heavy-load-bearing applications, including steering knuckles, spring shackles, heavy equipment pivot joints and other components operating in high-load, low-speed conditions.

- Use in applications that require NLGI No. 1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
GPOR1CR	EA	(1) 425-g. Cartridge	10.20
GPOR1CR	CA	(10) 425-g. Cartridges	101.00
GPOR1CR	PK	(40) 425-g. Cartridges	404.00
GPOR135	EA	15.8-kg. Lug*	345.40
GPOR199	EA	54.4-kg. Keg*	1,153.60

- Use in applications that require NLGI No. 2

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
GPOR2CR	EA	(1) 425-g. Cartridge	10.55
GPOR2CR	CA	(10) 425-g. Cartridges	103.00
GPOR2CR	PK	(40) 425-g. Cartridges	408.00
GPOR235	EA	15.8-kg. Lug*	355.50
GPOR299	EA	54.4-kg. Keg*	1,187.30
GPOR240	EA	181.4-kg. Drum*	3,847.05

Synthetic Polymeric Truck, Chassis/Equipment Grease

Delivers excellent wear protection and performance in severe-service, extreme-pressure environments such as axle assemblies, U-joints, pivot pins, fifth-wheel plates, steering linkages, kingpins, water pump bearings, ball joints and other greasable bearings and chassis components.

- Use in applications that require NLGI No. 1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
GPTR1CR	EA	(1) 397-g. Cartridge	9.00
GPTR1CR	CA	(10) 397-g. Cartridges	89.00
GPTR1CR	PK	(40) 397-g. Cartridges	350.00
GPTR135	EA	15.8-kg. Lug*	323.90
GPTR199	EA	54.4-kg. Keg*	1,079.00
GPTR140	EA	181.4-kg. Drum*	3,491.85

- Use in applications that require NLGI No. 2

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
GPTR2CR	EA	(1) 397-g. Cartridge	9.70
GPTR2CR	CA	(10) 397-g. Cartridges	95.50
GPTR2CR	PK	(40) 397-g. Cartridges	378.00
GPTR235	EA	15.8-kg. Lug*	352.30
GPTR299	EA	54.4-kg. Keg*	1,176.40
GPTR240	EA	181.4-kg. Drum*	3,816.60

Arctic Synthetic Grease

Provides extreme low-temperature pumpability and superior protection for equipment operating in harsh climates where temperatures drop well below freezing.

- Use in applications that require NLGI No. 1

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
GECCR	EA	(1) 425-g. Cartridge	15.00
GECCR	CA	(10) 425-g. Cartridges	146.50
GECCR	PK	(40) 425-g. Cartridges	576.00

GLC



GLC3P



GLCGN



Synthetic Multi-Purpose Grease

Delivers premium wear protection for bearings, bushings, chassis lubrication and other applications.

Use in applications that require NLGI No. 2 • GC/LB

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
GLCCR	EA	(1) 397-g. Cartridge	9.25
GLCCR	CA	(10) 397-g. Cartridges	89.00
GLCCR	PK	(40) 397-g. Cartridges	346.00
GLC3P	EA	(3) 85-g. Cartridges	11.10
GLC3P	CA	(30) 85-g. Cartridges	106.00
GLCGN	EA	Grease Gun Kit	38.50
GLC35	EA	15.8-kg. Lug*	303.45
GLC99	EA	54.4-kg. Keg*	985.20
GLC40	EA	181.4-kg. Drum*	3,205.35

GWR



GWR3P



Synthetic Water-Resistant Grease

Provides outstanding water-washout and spray-off resistance for applications frequently exposed to water, mud, snow or ice.

Use in applications that require NLGI No. 2 • GC/LB

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
GWRRCR	EA	(1) 397-g. Cartridge	9.65
GWRRCR	CA	(10) 397-g. Cartridges	93.00
GWRRCR	PK	(40) 397-g. Cartridges	362.00
GWR3P	EA	(3) 85-g. Cartridges	11.90
GWR3P	CA	(30) 85-g. Cartridges	114.00
GWR35	EA	15.8-kg. Lug*	318.45
GWR99	EA	54.4-kg. Keg*	1,028.95

FWG



Synthetic Fifth-Wheel Grease

Heavy-duty grease that provides outstanding protection and performance in the heavily loaded, harsh operating environments of fifth-wheel hitches used in trucking and trailer applications.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
FWGTB	EA	(1) 296-ml. Tube	9.65
FWGTB	CA	(12) 296-ml. Tubes	111.00

*Not stocked in all distribution centers. Call for availability.

Four-Stroke Power Equipment Testing

Zero-turn mowers face high ambient temperatures that accelerate oil breakdown, leading to varnish and carbon deposits that stick rings and exhaust valves. This results in **compression and power loss, smoke, increased maintenance and early equipment failure**, all of which hinder your efficiency and profitability.

Outstanding Protection for Zero-Turns and Other Four-Stroke Equipment

Formulated with low-volatility synthetic base oils, a heat-stable additive system and concentrated carbon cleaners, commercial-grade AMSOIL Synthetic Small-Engine Oil effectively resists oil breakdown and damaging deposits, providing outstanding protection and peak performance for the life of your equipment, maximizing productivity.

Preventing Exhaust-Valve Sticking

We tested 10W-30 Synthetic Small-Engine Oil against a leading oil brand for 125 hours in a Honda** 5 HP engine. The results are clear and clean (see pictures on top of opposite page).

Fighting Carbon Buildup

We tested Synthetic Small-Engine Oil for 500 hours in a Kawasaki** FX 730 V engine. Results show it kept pistons and rings virtually free of carbon and wear (see pictures on bottom of opposite page).




AMSOIL Synthetic Small-Engine Oil Resists Oil Breakdown and Deposits

- **Preserves** Power
- **Maximizes** Productivity
- **Reduces** Maintenance
- **Reduces** Smoke
- **Improves** Performance
- **Extends** Equipment Life




See page 41 for ordering information.

AMSOIL Synthetic Small-Engine Oil

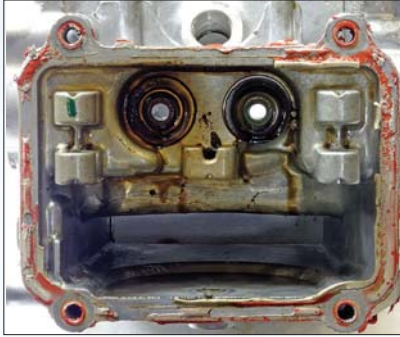

125 Hours

Leading Oil Brand

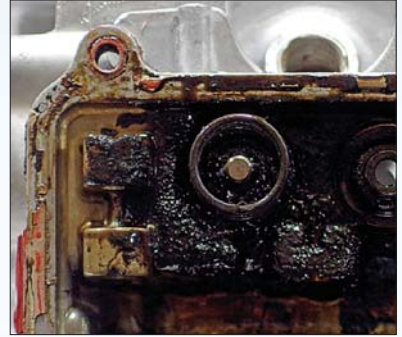

VS.

125 Hours

AMSOIL Synthetic Small-Engine Oil



500 Hours



Two-Stroke Power Equipment Testing

Carbon buildup severely affects the performance of two-stroke lawn care equipment, causing stuck rings and plugged exhaust ports and screens. The end result is **power loss, smoke, rough-running** and **hard-starting** that frustrates your crew, increases the need for equipment maintenance, contributes to early equipment failure and hinders your ability to efficiently and profitably deliver professional-looking lawns and grounds.

Outstanding Protection for Two-Stroke Power Equipment

Formulated with top-grade synthetic base oils, super-high lubricity and concentrated active cleaning agents, AMSOIL SABER® Professional Synthetic 2-Stroke Oil (ATP) effectively combats carbon buildup, providing outstanding protection and peak performance for the life of your equipment, keeping it on the job and contributing to your bottom line.

COMPARED HEAD-TO-HEAD WITH A LEADING OIL BRAND, AMSOIL SABER PROFESSIONAL KEEPS EQUIPMENT 96% CARBON-FREE*

We tested SABER Professional against a leading oil brand for 300 hours in Stihl* string trimmers. The results are clear and clean (see opposite page).

Carbon Robs Power. SABER Fights Carbon.

- Preserves Power
- Reduces Smoke
- Eases Starts
- Improves Performance
- Reduces Maintenance
- Extends Equipment Life

*Based on spark-arrestor testing. All results based on 50:1 mix ratio.



DULUTH LAWN CARE INCREASES EQUIPMENT LIFE AND SAVES MONEY

"There's a lot of stresses that go into owning a small business, but putting AMSOIL in our equipment gives me the satisfaction that the equipment is going to last longer and be dependable for us."

— Matt Marciniak, Duluth Lawn Care



See page 41 for ordering information.

Prevents Stuck Rings

AMSOIL SABER® Professional



300 Hours

VS.

Leading Oil Brand



300 Hours

Fights Exhaust-Port Plugging

AMSOIL SABER Professional




300 Hours

0% Port Blockage

VS.

Leading Oil Brand

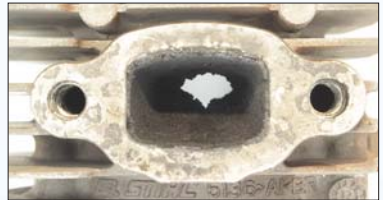


300 Hours

70% Port Blockage

Prevents Spark Arrestor Screen Plugging

AMSOIL SABER Professional

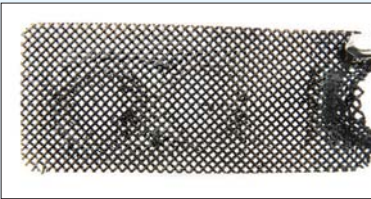

300 Hours

3.8% Screen Blockage

VS.

Leading Oil Brand



45 Hours

98% Screen Blockage

SAVINGS AND CONVENIENCE

AMSOIL SABER® Professional delivers the convenience of one mix ratio for all your two-stroke equipment, as well as outstanding equipment protection, low smoke and fuel stabilization.





AES



ASE



ASF



SEF



AHF



ABC



ATP

SABER® Ratio™
100:1..... 10ml..... 1L

Synthetic Small-Engine Oil

Helps preserve engine power, reduce oil consumption and reduce maintenance in small engines used in severe service.

Use in equipment that requires API SL, SJ, SH, SG • API CF, CD • JASO MA/MA2

○ 5W-30

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
AESQT	EA	(1) 946-ml Bottle	10.20
AESQT	CA	(12) 946-ml Bottles	116.40

● 10W-30

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ASEQTC	EA	(1) 946-ml Bottle	10.20
ASEQTC	CA	(12) 946-ml Bottles	116.40
ASE05	EA	(1) 18.9-litre Pail	185.40
ASE30	EA	113-litre Drum*	1,039.60
ASE55	EA	208-litre Drum*	1,841.15

● 10W-40

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ASFQT	EA	(1) 946-ml Bottle	10.75
ASFQT	CA	(12) 946-ml Bottles	122.40
ASF05	EA	(1) 18.9-litre Pail	195.85
ASF55	EA	208-litre Drum*	1,954.30

● 15W-50

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
SEFQT	EA	(1) 946-ml Bottle	9.60
SEFQT	CA	(12) 946-ml Bottles	109.20

● 20W-50 Zero-Turn Synthetic Hydrostatic Transmission Fluid

Fights wear to deliver smooth control and responsive power in zero-turn hydrostatic mowers.

Use in hydrostatic transmissions that require 15W-50 or 20W-50 oil recommended for API SM, SL, SJ, SH or SG.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
AHFQT	EA	(1) 946-ml Bottle	13.20
AHFQT	CA	(12) 946-ml Bottles	150.60
AHF05	EA	(1) 18.9-litre Pail	242.15
AHF55	EA	208-litre Drum*	2,463.05

● Semi-Synthetic Bar and Chain Oil

Delivers excellent lubrication and protection, helping extend the life of bar and chain applications.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ABCQT	EA	(1) 946-ml Bottle	7.00
ABCQT	CA	(12) 946-ml Bottles	79.80
ABC05	EA	(1) 18.9-litre Pail	125.10
ABC55	EA	208-litre Drum*	1,170.45

● SABER® Professional Synthetic 2-Stroke Oil

Covers all mix ratios in any handheld two-stroke equipment at any mix ratio up to 100:1, providing the ultimate in convenience.


Use in power equipment that requires ISO-L-EGD • API TC • JASO FD

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ATPSFC	EA	(1) 189-ml Bottle	4.55
ATPSFC	CA	(12) 189-ml Bottles	51.60
ATPBCC	EA	(1) 237-ml Bottle	5.00
ATPBCC	CA	(12) 237-ml Bottles	57.00
ATPQTC	EA	(1) 946-ml Bottle	13.40
ATPQTC	CA	(12) 946-ml Bottles	153.00
ATP30	EA	113-litre Drum*	1,400.80
ATP55	EA	208-litre Drum*	2,501.60

*Not stocked in all distribution centers. Call for availability.

Preserves Horsepower and Performance


AMSOIL delivers 18 percent more lubricity than Lucas** and 20 percent more than Sea Foam** for better retention of horsepower and fuel economy.^R

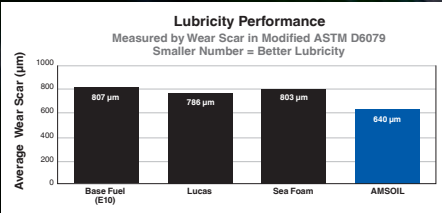

^RBased on independent testing of AMSOIL Upper Cylinder Lubricant, Lucas Upper Cylinder Lubricant and Sea Foam Motor Treatment obtained on 02/13/2019 using the ASTM D6079 modified for use with gasoline.

AMSOIL Improves Stability


AMSOIL provides fuel stability that Sea Foam Motor Treatment can't match, helping maintain startability and protect against the formation of varnish and gum.²

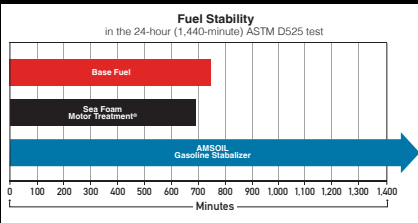

²Based on independent testing of AMSOIL Gasoline Stabilizer obtained Nov. 8, 2018 and Sea Foam Motor Treatment purchased Oct. 25, 2018 in the ASTM D525 using test fuel containing no oxidation-stability improving additives.

AMSOIL Fights Corrosion

AMSOIL provides corrosion protection Sea Foam Motor Treatment can't match, helping maintain power and performance and keeping metal looking like new even when subjected to salt water.^x

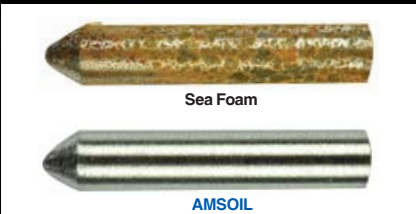

^xBased upon independent testing of AMSOIL Gasoline Stabilizer obtained Nov. 8, 2018 and Sea Foam Motor Treatment purchased Oct. 25, 2018 in a modified NACE TM0172 using synthetic sea water per ASTM D665 part B.





Gasoline Stabilizer

Helps prevent the formation of varnish and sludge in stored seasonal equipment such as snowmobiles, lawnmowers, motorcycles and boats. 60 ml treats 19 litres of fuel.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ASTCNC	EA	(1) 473-ml Bottle	12.90
ASTCNC	CA	(6) 473-ml Bottles	73.50

P.i.®

Maximizes fuel economy and reduces emissions in gasoline direct-injected and port-fuel-injected engines. Bottle compatible with capless fuel systems. Treats up to 113.56 L. Add entire bottle to tank every 6,437 km.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
CPICN	EA	(1) 354-ml. Bottle	13.50
CPICN	CA	(12) 354-ml. Bottles	154.20

Quickshot®

Effectively addresses performance issues related to ethanol, water and dirty pump gas in two- and four-stroke gasoline-powered engines and powersports equipment fuel systems, restoring peak performance. Designed for an initial clean-up dose of one bottle per 23 litres of gasoline, followed by one bottle per 45 litres thereafter.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
AQSCNC	EA	(1) 236-ml Bottle	10.05
AQSCNC	CA	(6) 236-ml Bottles	57.30

DOMINATOR® Octane Boost

Improves the performance of all two-and four-stroke gasoline-fueled engines. Treats up to 57 litres of gasoline.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
COBBE	EA	(1) 354-ml. Bottle	10.85
COBBE	CA	(6) 354-ml. Bottles	61.80

Upper Cylinder Lubricant Gasoline Additive


Lubricates fuel system and upper cylinders. Fights ethanol-related corrosion. Helps keep injectors clean. Bottle compatible with capless fuel systems. Use entire bottle at every fill-up.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
UCLCNC	EA	(1) 177-ml Bottle	5.05
UCLCNC	CA	(12) 177-ml Bottles	57.60



Superior Cold-Temperature Protection

Provides as much as **18°C better protection** against cold-temperature gelling than Howes Lubricator Diesel Treat.[™] Plus raises cetane up to 4 points.

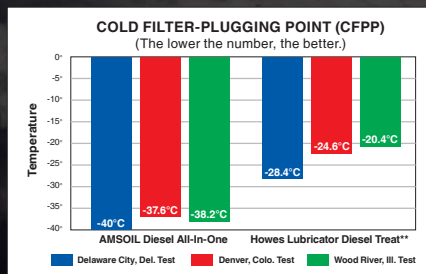

***Based on third-party testing in July 2017 of AMSOIL Diesel All-In-One and Howes Lubricator Diesel Treat using diesel fuel representative of the U.S. marketplace and Howes' recommended treat ratio for above -17.8°C.*

DRC



CCB



ADF



ADS



ADB



Diesel Recovery

Emergency diesel fuel treatment that dissolves the wax crystals that form when diesel fuel has surpassed its cloud point. 30 ml treats 3.79 L of fuel.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
DRCQTC	EA	(1) 887-ml Bottles	14.50
DRCQTC	CA	(12) 887-ml Bottles	165.60

Diesel Cetane Boost

Raises the cetane number of diesel fuel up to eight points for maximum horsepower, increased fuel economy and easier starts in all diesel engines. 30 ml treats up to 37.85 L of fuel.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
CCBCN	EA	(1) 473-ml Bottle	9.90
CCBCN	CA	(12) 473-ml Bottles	112.80
ACB05	EA	(1) 18.9-litre Pail	278.60
ACB55	EA	208-litre Drum*†	2,854.20

Diesel Injector Clean

Targets traditional nozzle deposits, combustion chamber deposits and internal diesel injector deposits found in HPCR injectors. Lubricates to reduce fuel pump and injector wear. Concentrated for rapid results, maximum horsepower and up to 8 percent increased fuel economy in engines with accumulated deposits. 30 ml treats up to 18.93 L of fuel.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ADFCNC	EA	(1) 473-ml Bottle	8.95
ADFCNC	CA	(12) 473-ml Bottles	102.00
ADF05	EA	(1) 18.9-litre Pail	248.30
ADF55	EA	208-litre Drum*†	2,487.70

Diesel Injector Clean + Cetane Boost

Combines the superior deposit-removing properties of Diesel Injector Clean with the cetane-boosting benefits of Diesel Cetane Boost in one convenient package. Safe for use in all diesel fuels, including biodiesel. 30 ml treats up to 18.93 L of fuel.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ADSCNC	EA	(1) 473-ml Bottle	13.55
ADSCNC	CA	(12) 473-ml Bottles	154.80
ADS05	EA	(1) 18.9-litre Pail	390.45
ADS55	EA	208-litre Drum*†	3,748.10

Diesel All-In-One

Combines the superior detergency and improved lubricity of Diesel Injector Clean, the excellent cold-flow and anti-gelling properties of Diesel Cold Flow and the increased horsepower and cetane of Diesel Cetane Boost in one convenient package. Protects against injector wear better than Sea Foam,** delivering 2X more diesel fuel lubricity.† Safe for use in all diesel fuels, including biodiesel. 30 ml treats up to 9.46 L of fuel.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ADBCNC	EA	(1) 473-ml Bottle	11.35
ADBCNC	CA	(12) 473-ml Bottles	129.60
ADB05	EA	(1) 18.9-litre Pail	340.30
ADB55	EA	208-litre Drum*†	3,500.45

*Based upon independent testing of AMSOIL All-In-One obtained Nov. 8, 2018 and Sea Foam Motor Treatment purchased on Oct. 25, 2018 in the ASTM D6079 test. †Product cannot be shipped air freight or parcel post. **Not stocked in all distribution centers. Call for availability.



HIGH-PERFORMANCE METAL PROTECTION

- **Cuts** through rust and frees frozen components
- **Helps** protect against rust and corrosion, even in salt water
- **Displaces** water
- **Stops** squeaks
- **Lubricates** moving parts





Metal Protector

Displaces water, penetrates, lubricates and protects metal surfaces from corrosion, including hinges, squeaky mechanical objects, electrical systems and more.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
CMPSC	EA	(1) 208-g. Spray Can	7.35
CMPSC	CA	(12) 208-g. Spray Cans	84.00

Engine and Transmission Flush

Helps restore operating efficiency, increase fuel economy and reduce emissions in gasoline and diesel engines and automatic transmissions.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
FLSHCNC	EA	(1) 473-ml Bottle	11.90
FLSHCNC	CA	(12) 473-ml Bottles	135.60
FLSH05	EA	(1) 18.9-litre Pail	357.95
FLSH55	EA	208-litre Drum*	3,575.05

*Not stocked in all distribution centers. Call for availability.





AMSOIL Resists Cavitation

In third-party, industry-standard testing, cylinder liners protected by AMSOIL showed virtually **no signs of cavitation.**¹



¹Based on results of the ASTM D7583 cavitation test.



○ Propylene Glycol Antifreeze & Coolant

Combines the benefits of biodegradability, low toxicity and all-climate protection for up to 241,000 kilometers or 5 years, whichever comes first, in passenger cars and light trucks. Protection up to 1,609,344 kilometers, 20,000 hours or 8 years, whichever comes first, in heavy-duty applications. Concentrated formula.

Use in applications that require ASTM D3306, D6210, D7583, D7820 • TMC RP329B, TMC RP338 • AS/NZS 2108.2004 Type A

Suitable for use with Case New Holland • Cummins 14603 • Cummins 3666132 • DDC 7SE 298, 93K217 • Freightliner 48-22880 • GM Heavy Truck • International Truck and Engine / Navistar CEMS B-1 Type III-A • JIS K2234 • MAN 324 NF • MB DBL 7700 • MTU MTL 5048 • Kenworth R026-170-97 • Mack 014GS17004, 014GS17009 • PACCAR CS0185 • DAF MAT 74002 • Peterbilt 8502.002 • Scania TB1451 • Volvo Heavy Truck

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
ANT1G	EA	(1) 3.78-litre Bottle	38.25
ANT1G	CA	(4) 3.78-litre Bottles	145.60
ANT55	EA	208-litre Drum*	1,888.20

DOMINATOR® Coolant Boost

Helps reduce engine temperatures, increase horsepower, promote faster engine warm-up times and reduce radiator and engine corrosion in racing and passenger vehicles.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
RDCBCN	EA	(1) 473-ml Bottle	13.05
RDCBCN	CA	(6) 473-ml Bottles	74.40



Fluid Extraction Pump

STOCK#	CAN. WHOLESALE
G2576	20.00

Aids in the removal of old fluids when servicing vehicles.

*Not stocked in all distribution centers. Call for availability.



EXTEND AIR TOOL LIFE

- **Helps** prevent corrosion and deposits, allowing air tools to run cleanly and reliably
- **Reduces** wear, extending tool life
- **Dispenses** easily

**Not stocked in all distribution centers. Call for availability.*



○ Synthetic Air Tool Oil

Effectively lubricates rotary and piston-type air-tool bearings and motors, while managing moisture and conditioning rubber and plastic seals and O-rings.

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
AIRBA	EA	(1) 118-ml Bottle	4.60
AIRBA	CA	(12) 118-ml Bottles	52.20

● Synthetic Compressor Oil

Superior protection for rotary screw, rotary vane, reciprocating and other compressor applications.

● Synthetic Compressor Oil

Use in compressors that require ISO 46 • SAE 20

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
PCIQTC	EA	(1) 946-ml Bottle	14.30
PCIQTC	CA	(12) 946-ml Bottles	163.20
PCI05	EA	(1) 18.9-litre Pail	264.25
PCI30	EA	113-litre Drum*	1,510.85
PCI55	EA	208-litre Drum*	2,694.90
PCI27	EA	1,041-litre Tote*	13,431.70

● Synthetic Compressor Oil

Use in compressors that require ISO 100 • SAE 30/40

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
PCKQTC	EA	(1) 946-ml Bottle	14.65
PCKQTC	CA	(12) 946-ml Bottles	167.40
PCK05	EA	(1) 18.9-litre Pail	270.40
PCK30	EA	113-litre Drum*	1,548.45
PCK55	EA	208-litre Drum*	2,763.65
PCK27	EA	1,041-litre Tote*	13,773.25

● Multi-Vehicle Synthetic Power Steering Fluid

Provides excellent wear protection, long component life and quiet operation in most passenger car/light trucks.

Use in applications that require American Motor Corporation C 4124; 4634 • BMW 82 11 0 148 132; 83 29 0 429 576; 81 22 1 468 879 & 82 11 1 468 041 • Chrysler MS-1872; MS-5931, MS-9602 & MS-11655 • Ford M2C138-CJ; ESW-M2C128-C&D; M2C195-A; M2C204-A & M2C33-F • GM/Saginaw PSF 9985010; 9985835; 89021184; 1050017 • Hyundai/Kia PSF-3; PSF-4 & PSF 00232-19017 • Mercedes Benz 236.3; 345.0; 001 989 24 03 10; 001 989 24 03 12 & Q 1 32 0001 • Mitsubishi Diamond SP III & PS Fluid • Navistar TMS 6810 • Nissan PSF-II • Porsche 000 043 206 56 • Saab 93160548; (45) 30 09 800 & 30 32 380 • Subaru K0209A0080 • Toyota PSF Type EH; P/N 008886-01; 008886-126 • Volvo 1161529 & 30741424 • VW/Audi TL-52148; G002000; G 004 000 M2; G 004 000 M7 & G 004 000 M8

STOCK#	UNITS	PKG./SIZE	CAN. WHOLESALE
PSFCNC	EA	(1) 473-ml Bottle	8.80
PSFCNC	CA	(12) 473-ml Bottles	100.20
PSF05	EA	(1) 18.9-litre Pail	241.45
PSF55	EA	208-litre Drum*	2,425.30



ISO 9001/14001 REGISTERED

AMSOIL INC.
One AMSOIL Center
Superior, WI 54880

WE HONOR



(Discover in U.S. only)

Your Servicing **AMSOIL Dealer**

Use this referral number to save time and make ordering easier. Call 1-800-777-7094 or log in at AMSOIL.ca ▼

Referral # **323230**

AMSOIL also offers a full line of premium synthetic lubricants for powersports applications. See your servicing **AMSOIL Dealer** for more information.



Minimum 10%
Post-Consumer Fiber

AMSOIL INC., 925 Tower Ave., Superior, WI 54880 • 715-392-7101 • Printed in the USA
© 2021, AMSOIL INC. All rights reserved. The AMSOIL logo is a registered trademark of AMSOIL INC.

G3474 6/21